




深圳市锦锋科技有限公司

SHENZHEN KINGFROM TECHNOLOGY CO., LTD.

SPECIFICATION

(产品规格书)



型号: LLM26PP05-8

8点光学液位传感器

(8-point optical level sensor)

版本 Version: V0.0

日期 Date : 2024/09/10

公司网址: www.kingfrom.top

● 修订记录 / Revision History

No.	日期/Date	备注/Remark	修订/Revision
1	20240910	发布版本/MP Version issue	V0.0

● 应用邻域 / Application

1. 水塔水位监测 / Water tower water level monitoring
2. 液位控制设备 / Liquid level control equipment
3. 漏液保护设备 / Leakage protection equipment
4. 缺液保护设备 / Lack of liquid protection equipment
5. 带水箱的产品 / Products with water tank
6. 热水器 / Water heater
热水器中没有液体，则做停止加热处理
If there is no liquid in the water heater, do stop heating treatment
7. 水族设备 / Aquarium equipment
可配合远程设备或者其他设备，实时监测鱼缸里面的液位是否正常，例如在低水位监测点安装传感器，若水位到达此点则提示，或在高液位监测点，水位超过则提示，以确保鱼缸水位不会过低过高。
It can work with remote devices or other devices to monitor whether the water level in the aquarium is normal in real time. For example, a sensor is installed at the low water level monitoring point to prompt if the water level reaches this point, or at the high water level monitoring point to prompt if the water level exceeds this point, so as to ensure that the water level of the aquarium is not too low or too high.


● 原理与优势 / Principle and Advantages

1. 光学式液体传感器的原理/ The principle of optical liquid sensors


传感器利用光电效应和光的棱镜的折射效应进行检测容器内是否有液体的存在，当容器内有液体时，传感器的红外发光源发出的光照射到棱镜上，由于棱镜的折射率和液体相似，不会或有少量的红外光被反射回来。当容器内没有液体，传感器的红外发光源发出的光照射到棱镜上，会进行反射光电二极管接收到红外光后，阻值发生改变，从而使电路中的电压随发生改变

The sensor uses the photoelectric effect and the refraction effect of the prism of light to detect whether there is liquid in the container, when there is liquid in the container, the light emitted by the infrared light source of the sensor irradiates the prism, because the refractive index of the prism is similar to that of the liquid, there will be no or a small amount of infrared light reflected back. When there is no liquid in the container, the light emitted by the sensor's infrared light source hits the prism, and the photodiode receives the infrared light, and the resistance value changes, so that the voltage in the circuit changes

无水状态光线模拟

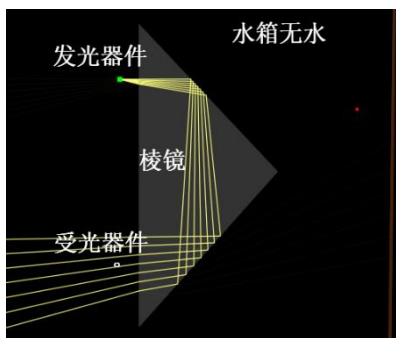

有水状态

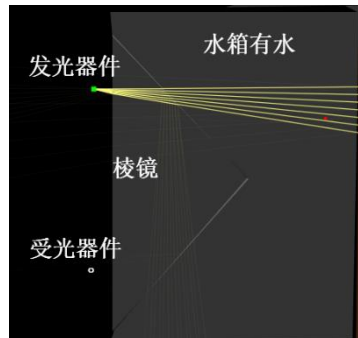

2. 优势 / Advantages

集成8点检测，接线简单

Integrated 8-point detection, simple wiring

M26的螺纹可随意更换

The threads of the M26 can be changed at will

光学方式检测精确可靠

Optical detection is accurate and reliable

使用寿命长

Long service life

● 选型表 / Selection Table

螺纹大小	型号	
M26	LLM26PP05-8	

此传感器输出为单输出PWM信号，客户可根据自己得控制器进行输出类型得定

制，
比如串口输出等。


客户需要根据自己的电路结构进行选型/定制，在不知电路结构的情况下请联系我
司工作人员

This sensor outputs a single output PWM signal, and customers can customize
the output type according to their own controller,

For example, serial port output, etc.

Customers need to select/customize according to their own circuit structure. If
you do not know the circuit structure, please contact our staff

命名规则（Naming conventions）：

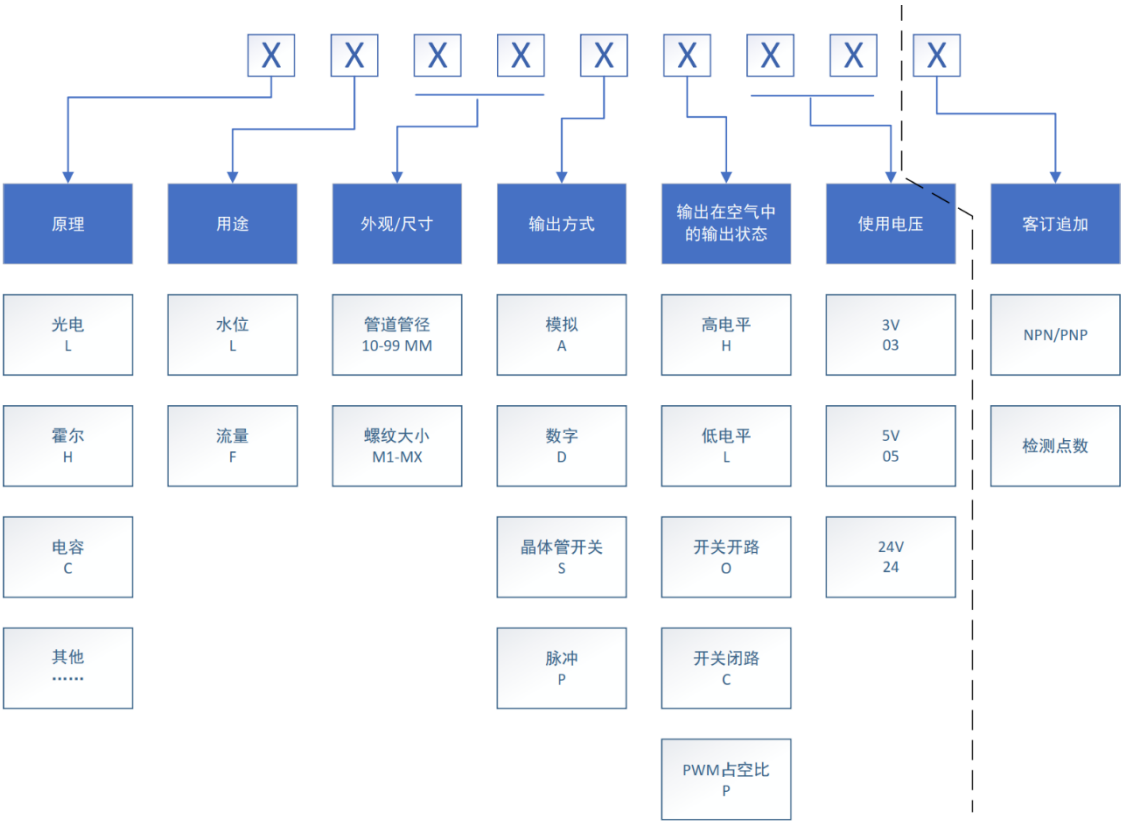


● 特性/Specification (Ta=25°C)

参数/Parameter	符号/Symbol	值/ value	单位/units
工作电压/Working Voltage	Vcc	5	V
功率/Power consumption	Pd	400	mW
在液体中输出状态/ Outputs status in liquid	OUT	对应点位1	-
在空气中输出状态/ Outputs status in the air	OUT	对应点位0	-
输出特性/Output Specification	Os	PWM	-
工作温度/Operating Temperature	Ot	-20 ~ 85 (表面无结霜)	°C
存储温度/Storage Temperature	St	-20 ~ 85	°C
工作寿命/ Operating life	OI	>50000	H
响应时间/Response Time	Rt	<500	Ms
承受压力/ Withstand pressure	F	30	Bar


● 输出解析 / Output Analysis

通过PWM输出得方式对应到点位（类似于HDQ单线协议）

1. 信号头/ Signal Head
连续20ms的高电平
Continuous 20ms high level
2. 数据/Date
循环8次的高低电平差
低电平7.5ms+高电平2.5ms表示此液位点无水 数字量为1
低电平2.5ms+高电平7.5ms表示此液位点有水 数字量为0
The high and low level difference after 8 cycles
Low level 7.5ms+high level 2.5ms indicates that there is no water at this liquid level point
Low level 2.5ms+high level 7.5ms indicates that there is water at this liquid level point
3. 数据结束/End Date
连续20ms的低电平
Continuous 20ms low level
4. 输出波形示意图/ Schematic diagram of output waveform

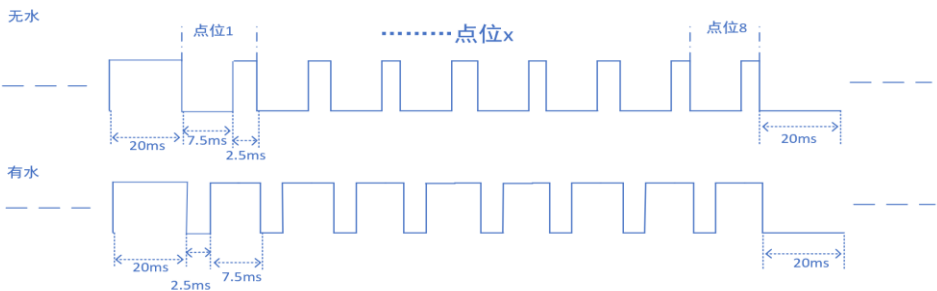

● 推荐应用电路 / Recommended Application Circuit

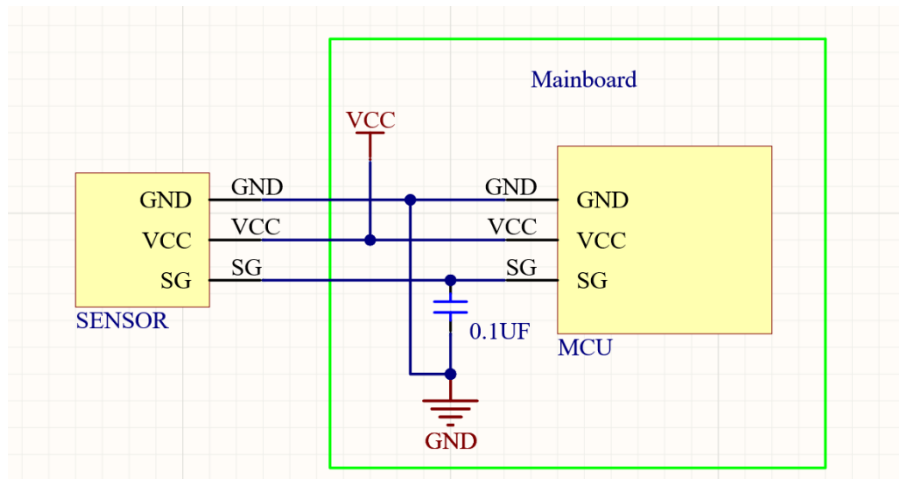

● 产品特性 / Product features

无机械运动结构，不存在卡死等诸多问题，检测可靠性高

There is no mechanical movement structure, there are no problems such as jamming, and the detection reliability is high

可选择多种材质应对您所需检测的液体

Choose from a variety of materials to suit the liquid you need

检测精度高，重复性好，相应快速

The detection accuracy is high, the repeatability is good, and the corresponding is fast

无需用户处理复杂数据，使用方便

It is easy to use without the need for users to deal with complex data

相比传统的单点传感器，内置安全准确的数据采集处理算法，可作为单点传感器使用，多余得点位用作保护装置

Compared to traditional single point sensors, with built-in secure and accurate data acquisition and processing algorithms, it can be used as a single point sensor, and excess points can be used as protective devices

● 尺寸和推荐安装 / Outline Drawing and Recommended Installation

